

# KSD5072


# NPN TRIPLE DIFFUSED PLANAR SILICON TRANSISTOR

## COLOR TV HORIZONTAL OUTPUT APPLICATION (DAMPER DIODE BUILT IN)

- High Collector-Base Voltage ( $V_{CB0}=1500V$ )
- High Switching Speed (tf. max=0.4uS)

### ABSOLUTE MAXIMUM RATING


Characteristic	Symbol	Rating	Unit
Collector Base Voltage	$V_{CB0}$	1500	V
Collector Emitter Voltage	$V_{CEO}$	800	V
Emitter Base Voltage	$V_{EBO}$	6	V
Collector Current	$I_C$	5	A
Collector Current (Peak)	$I_C$	16	A
Collector Dissipation ( $T_C=250^\circ C$ )	$P_C$	60	W
Junction Temperature	$T_J$	150	$^\circ C$
Storage Temperature	$T_{STG}$	-50 ~ 150	$^\circ C$

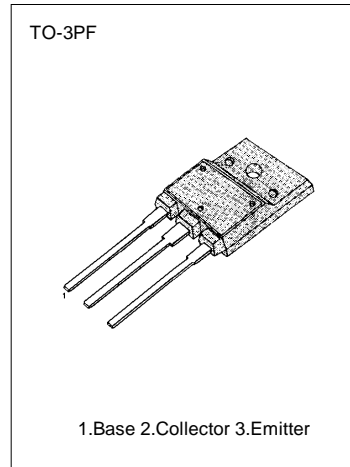


### ELECTRICAL CHARACTERISTICS ( $T_C=25^\circ C$ )

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB} = 800V, I_E = 0$			10	$\mu A$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB} = 4V, I_C = 0$	40		200	mA
DC Current Gain	$h_{FE}$	$V_{CE} = 5V, I_C = 1A$	8		-	-
Collector Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 4A, I_B = 0.8A$		3	5	V
Base Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C = 4A, I_B = 0.8A$			1.5	V
Current Gain Bandwidth Product	$f_T$	$V_{CE} = 10V, I_C = 1A$		3		MHz
Damper Diode Turn On Voltage	$V_F$	$I_F = 5A$			2	V
Fall Time	$t_F$	$I_C = 4A, I_{B1} = 0.8A$ $I_{B2} = -1.6A, V_{CC} = 200V$ $R_L = 50\Omega$			0.4	$\mu S$


-EQUIVALENT CIRCUIT




-SWITCHING TIME TEST CIRCUIT

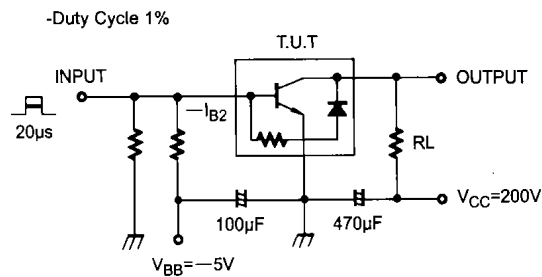


STATIC CHARACTERISTIC

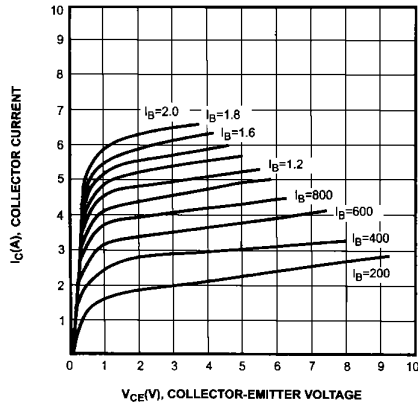


DC CURRENT GAIN

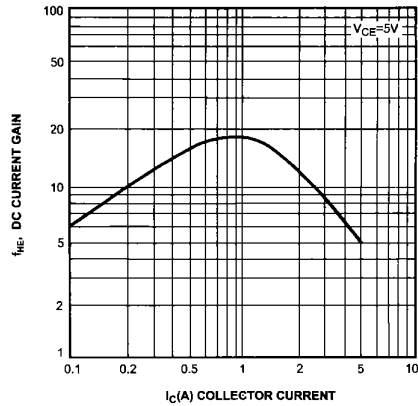


COLLECTOR-EMITTER SATURATION VOLTAGE

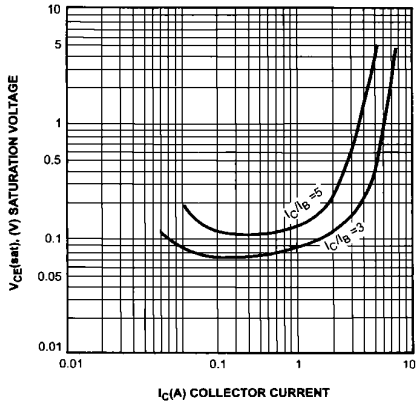


BASE-EMITTER SATURATION VOLTAGE

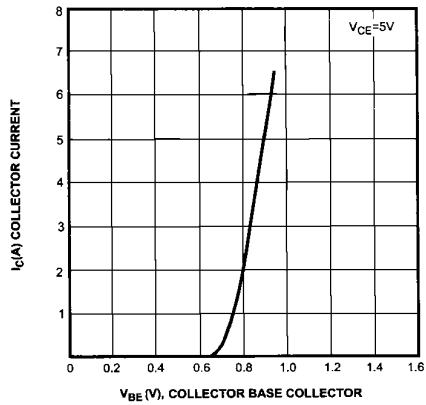

SWITCHING TIME

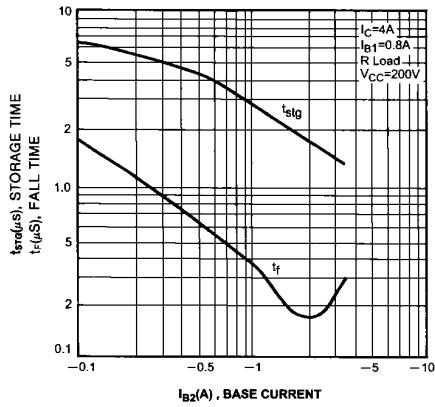

POWER DERATING

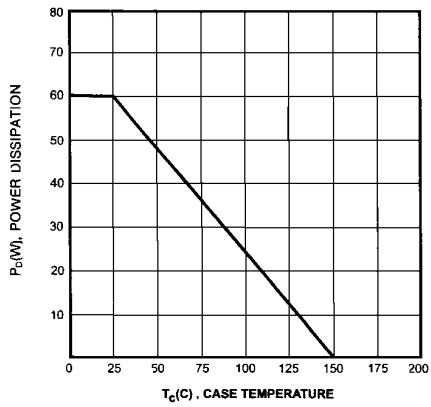

KSD5072

# NPN TRIPLE DIFFUSED PLANAR SILICON TRANSISTOR

